


A field serviceable and integrated Blow Down Valve

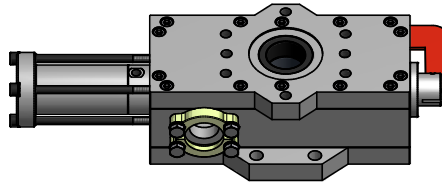

Application	Exploration Rigs RC and Multipurpose Drill Rigs	
General Arrangement	The Blow Down has a compact design Internal Valving, not requiring any external 3 way valving Retainer type mount, easily retro fitted to any flange / mount Air connections with standard SAE flange / mount	
Features	Totally field serviceable	
Pressure Rating	60 bars	
Data	Through Hole 50mm diameter	
Dimensions	Body Dimension	525 x 140 x 131mm
	Flange Width	200mm
Accessories	1 x Wear Kit	Part # 10 001 4387
	1 x Overhaul Kit	Part # 10 001 4388
Hydraulic Supply	Approx 20 - 40 l/min @ 150 - 200bars Supply from drill rig 1 x directional valve	
Weight	Approx. 46kg	

Part No. 07 001 2685