


Data Sheet  
**MRS 3T32 BH**



A simple and efficient 3Tier Riffle Splitter for wet and dry sampling

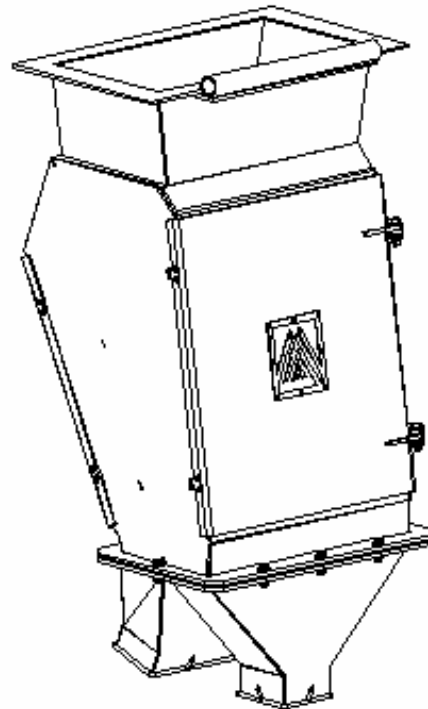

Application	- For Rig or Trailer mounted sampling application in wet and dry conditions
General Arrangement	- 3Tier Riffle Splitter that can be mounted under our standard 750 cfm Cyclone
Splitting Rate	-Sample 12.5% -Waste 87.5%
Features	-Riffle Splitter with 32mm riffle width -Inspection door on both sides for easy cleaning of unit and dust suppression -Carry handles -Mounting plate for Vibrator
Accessories	-Vibrator
Dimensions	-Depth 460 -Width 530 (over top flange) -Height 1000 (top of hinge to bottom of sample chute) -Top flange dimension 550 x 300 -Top flange opening 401 x 230
Weight	-Approx 52 kg
<b>Part No.</b>	<b>08 001 3223      Riffle width 32</b>