


# Data Sheet

## MRS 3T32 EXP

A simple and efficient 3Tier Riffle Splitter for wet and dry sampling

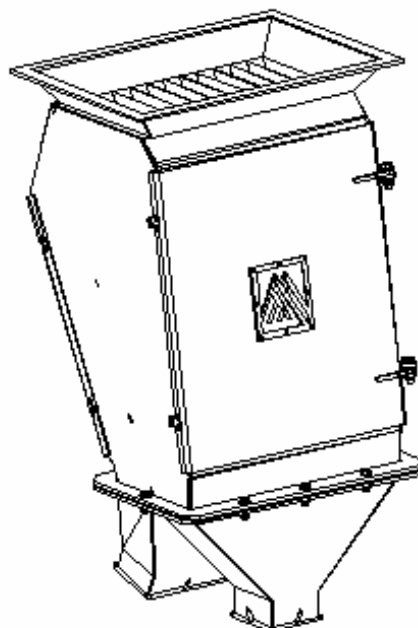

Application	- For Rig or Trailer mounted sampling application in wet and dry conditions
General Arrangement	- 3Tier Riffle Splitter that can be mounted under our standard 1200 cfm Cyclone
Features	-Riffle Splitter with 32mm riffle width versions -Inspection door on both sides for easy cleaning of unit and dust suppression -Carry handles -Mounting plate for Vibrator
Accessories	-Vibrator
Dimensions	-Depth 460 -Width 530 (over top flange) -Height 877 (top of flange to bottom of sample chute) -Top flange outer dimension 530 x 340 -Top flange opening 480x290 -Riffle opening 401x230
Weight	-Approx 47 kg
<b>Part No.</b>	<b>08 001 3222      Riffle width 32</b>