




Data Sheet
MRS 4T32 BH

A simple and efficient 4 Tier Riffle Splitter for wet and dry sampling

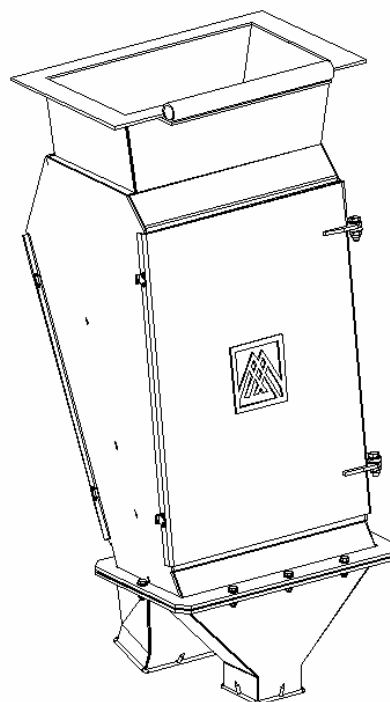

Application	- For Rig or Trailer mounted sampling application in wet and dry conditions
General Arrangement	- 4Tier Riffle Splitter that can be mounted under our standard 750 cfm Cyclone
Splitting Rate	-Sample 6.25% -Waste 93.75%
Features	-Riffle Splitter with 32mm riffle width versions -Inspection door on both sides for easy cleaning of unit and dust suppression -Carry handles -Mounting plate for Vibrator
Accessories	-Vibrator
Dimensions	-Depth 500 -Width 550 (over top flange) -Height 1114 (top of hinge to bottom of sample chute) -Top flange outer dimension 550 x 300 -Top flange opening 401 x 230
Weight	-Approx 54kg
Part No.	08 001 3248 Riffle width 32