




Data Sheet
MRS 4T32 EXP

A simple and efficient 4Tier Riffle Splitter for wet and dry sampling

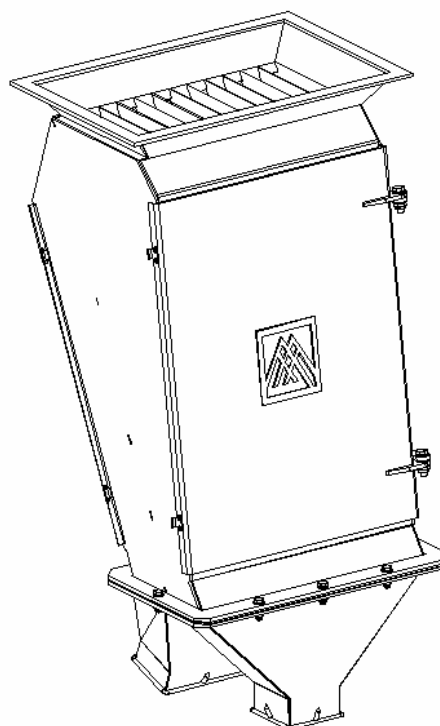

Application	- For Rig or Trailer mounted sampling application in wet and dry conditions
General Arrangement	-4Tier Riffle Splitter that can be mounted under our standard 1200 cfm Cyclone
Splitting Rate	-Sample 6.25% -Waste 93.75%
Features	-Riffle Splitter with 32mm riffle width -Inspection door on both sides for easy cleaning of unit and dust suppression -Carry handles -Mounting plate for Vibrator
Accessories	-Vibrator
Dimensions	-Depth 500 -Width 530 (over top flange) -Height 990 (top of flange to bottom of sample chute) -Top flange outer dimension 530 x 340 -Top flange opening 480x290 -Riffle opening 401x230
Weight	-Approx 48 kg
Part No.	08 001 3247 Riffle width 32